


Ref. **3163**

MACHO MÁQUINA MÉTRICA LAMINACIÓN MANGO REFORZADO

Reinforced Shank Cold Forming Metric Machine Tap
Taraud Machine Métrique Réfourleur Queue Renforcée




HSSE 5% Co	TICN	DIN 2174	C 2-3h		Tol. 6HX	
---------------	------	-------------	-----------	--	-------------	--



Material		Vc
Grupo	Sub.	TICN
1	1.1	10-15
	5.1	15-30
5	5.2	15-30
	6.1	15-35
6	6.2	15-30

Vc= m/min.

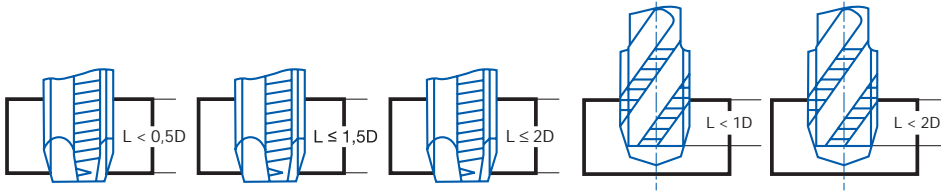

Materiales con un Coeficiente de Alargamiento de 12-14% - 12-14% Lengthening Coefficient Materials - Matériaux avec coefficient de rallonge 12-14%

M	P	L mm	l mm	d mm	a mm	Nº Art. TICN	€
M3	0,50	56	10	3,50	2,70	21818	30,46
M3,5	0,60	56	11	4,00	3,00	21819	31,92
M4	0,70	63	12	4,50	3,40	21820	30,46
M5	0,80	70	14	6,00	4,90	21821	30,46
M6	1,00	80	16	6,00	4,90	21822	32,84
M8	1,25	90	18	8,00	6,20	21823	38,35
M10	1,50	100	20	10,00	8,00	21824	42,62
M12	1,75	110	22	9,00	7,00	21825	50,17